

**ROOM THERMOSTATS 1 STAGE**

EOF..

These products can be used to monitor the temperature inside buildings and switch heating, cooling or other units. These units are tamperproof.



**TA-2**  
Main adjustment via knob.  
Backplate for 1 gang BS box is included.



**RTBSB-001.010/045/048**  
Knob adjustment only.  
Range and limit stops provided.  
Order backplate separately.  
Enclosure Flammability = UL94-V0

**RTBSB-001.910**  
Adjustment under the cover.

Type	Stages	Range °C	Diff °C approx	230VAC Element		Function	Sensing	Enclosure
<b>TA-2</b>	1	5/30	1	SPDT 10(2.5)A	Volt Free Contacts	Htg or Clg	Bellows	IP20
<b>RTBSB-001.045</b>	1	-20/+30	0.5	SPDT 10(3)A	-	Htg or Clg	Bimetal	IP30
<b>RTBSB-001.010</b>	1	5/30	0.5	SPDT 10(3)A	-	Htg or Clg	Bimetal	IP30
<b>RTBSB-001.048</b>	1	10/60	0.5	SPDT 10(3)A	-	Htg or Clg	Bimetal	IP30
<b>RTBSB-001.910*</b>	1	5/30	0.5	SPDT 10(3)A	-	Htg or Clg	Bimetal	IP30

\* Concealed adjustment.

**DIMENSIONS**

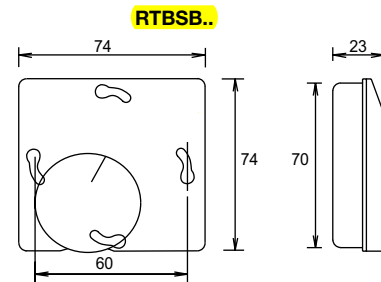

**ACCESSORIES:**

<b>EG-1000</b>	Stat Guard Internal Dims	133 H x 155 W x 70 D
<b>EG-2000</b>	Stat Guard Internal Dims	102 H x 123 W x 60 D
<b>EG-3000</b>	Stat Guard Internal Dims	123 H x 196 W x 70 D

High impact polycarbonate, virtually unbreakable. Supplied with lock & key






**EE-BP2 Backplate for RTBSB.. will fit square or round outlet boxes.**

**EG..**

**EE-8P2**

**WIRING:**

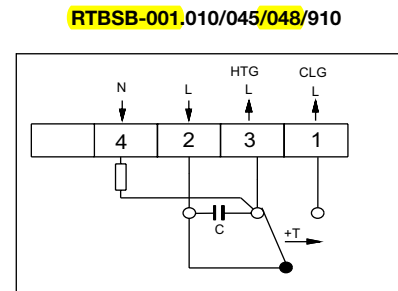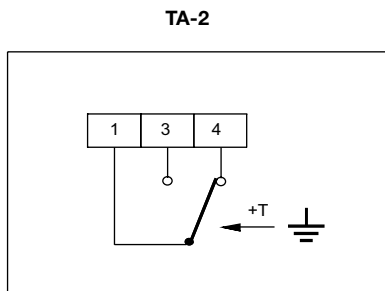

**INSTALLATION:** Install at a height of approx. 1.5m  
Keep away from radiators, direct sunlight & other heat sources.